
DeepRoot Green Infrastructure




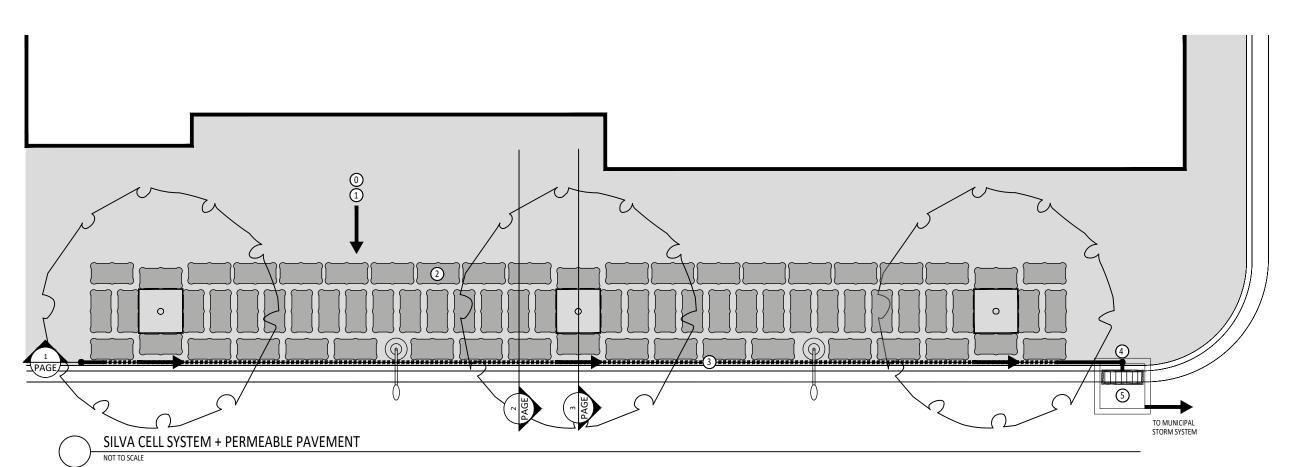

KEY PLAN

0 PRETREATMENT, AS REQUIRED, BY OTHERS

- 1 STORMWATER ENTERS THE SILVA CELL SYSTEM THROUGH A PERMEABLE PAVEMENT SYSTEM
- 2 WATER MOVES THROUGH THE PLANTING SOIL HOUSED WITHIN THE SILVA CELL SYSTEM
- 3 EXCESS WATER IS COLLECTED IN A PERFORATED DRAIN PIPE AND IS DIRECTED TOWARD A DOWNSTREAM CATCH BASIN
- 4 CLEANOUT
- 5 WATER COLLECTED IN THE COLLECTION PIPE IS DIRECTED TO THE MUNICIPAL STORM SYSTEM

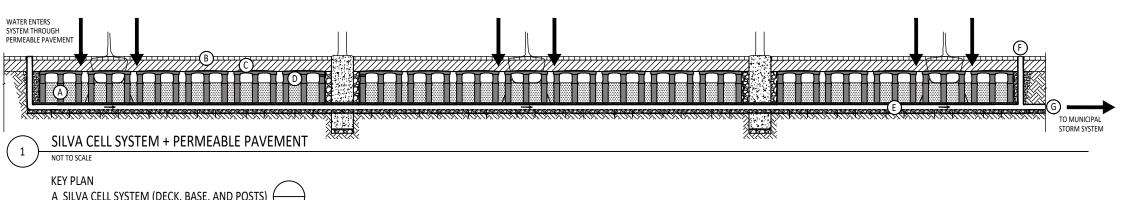

A SILVA CELL SYSTEM (DECK, BASE, AND POSTS) B PERMEABLE PAVEMENT

C AGGREGATE STORAGE LAYER

D OPTIONAL PONDING SPACE


E COLLECTION PIPE

F CLEANOUT

G CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW -

DeepRoot Green Infrastructure www.deeproot.com

T 415 781 9700 F 415 781 0191

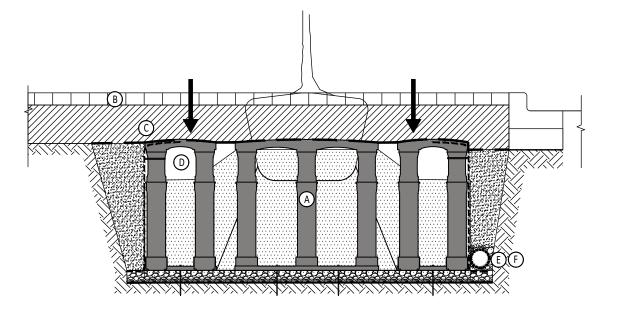


SILVA CELL SYSTEM + PERMEABLE PAVEMENT

NOT TO SCALE

KEY PLAN

- A SILVA CELL SYSTEM (DECK, BASE, AND POSTS)
- B PERMEABLE PAVEMENT
- C AGGREGATE STORAGE LAYER
- D OPTIONAL PONDING SPACE
- E COLLECTION PIPE
- F CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW

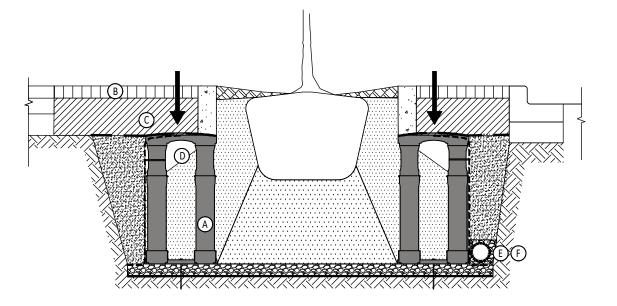

SILVA CELL SYSTEM + PERMEABLE PAVEMENT

NOT TO SCALE


KEY PLAN

A SILVA CELL SYSTEM (DECK, BASE, AND POSTS)




- C AGGREGATE STORAGE LAYER
- D OPTIONAL PONDING SPACE
- E COLLECTION PIPE
- F CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW

DeepRoot Green Infrastructure www.deeproot.com

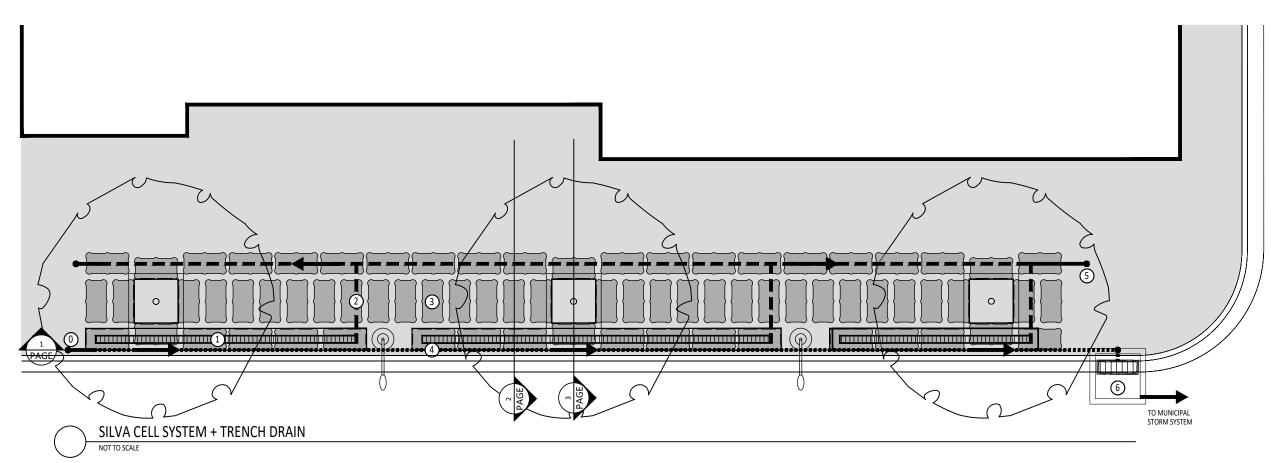

KEY PLAN

- O PRETREATMENT, AS REQUIRED, BY OTHERS
- 1 STORMWATER ENTERS THE SILVA CELL SYSTEM THROUGH A TRENCH DRAIN SYSTEM
- 2 WATER IS DISTRIBUTED THROUGH THE SILVA CELL SYSTEM THROUGH PERFORATED PIPES
- 3 WATER MOVES THROUGH THE PLANTING SOIL HOUSED WITHIN THE SILVA CELL SYSTEM
- 4 EXCESS WATER IS COLLECTED IN A PERFORATED DRAIN PIPE AND IS DIRECTED TOWARD A DOWNSTREAM CATCH BASIN
- 5 CLEANOUT
- 6 WATER COLLECTED IN THE COLLECTION PIPE IS DIRECTED TO THE MUNICIPAL STORM SYSTEM

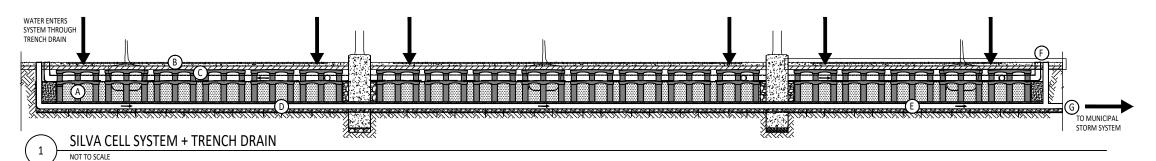



KEY PLAN

- A SILVA CELL SYSTEM (DECK, BASE, AND POSTS) B TRENCH DRAIN
- C OPTIONAL PONDING SPACE
- C DISTRIBUTION PIPE
- D COLLECTION PIPE
- E CLEANOUT
- F CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW

DeepRoot Green Infrastructure www.deeproot.com

T 415 781 9700 F 415 781 0191

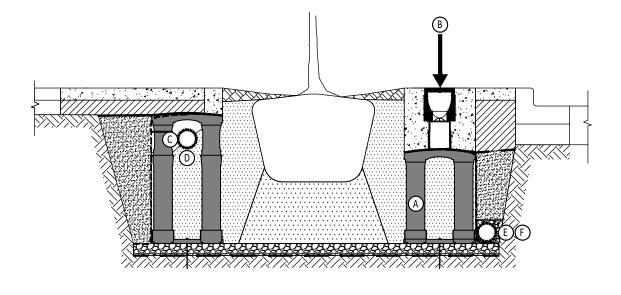

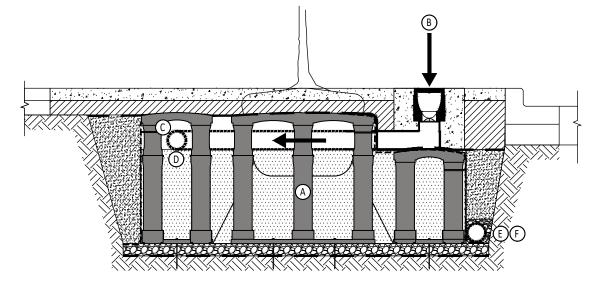

SILVA CELL SYSTEM + TRENCH DRAIN

NOT TO SCALE

KEY PLAN

A SILVA CELL SYSTEM (DECK, BASE, AND POSTS)



C OPTIONAL PONDING SPACE

D DISTRIBUTION PIPE

E COLLECTION PIPE

F CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW



NOT TO SCALE

KEY PLAN

A SILVA CELL SYSTEM (DECK, BASE, AND POSTS)



B TRENCH DRAIN
C OPTIONAL PONDING SPACE


D DISTRIBUTION PIPE

E COLLECTION PIPE

F CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW

DeepRoot Green Infrastructure www.deeproot.com

T 415 781 9700 F 415 781 0191

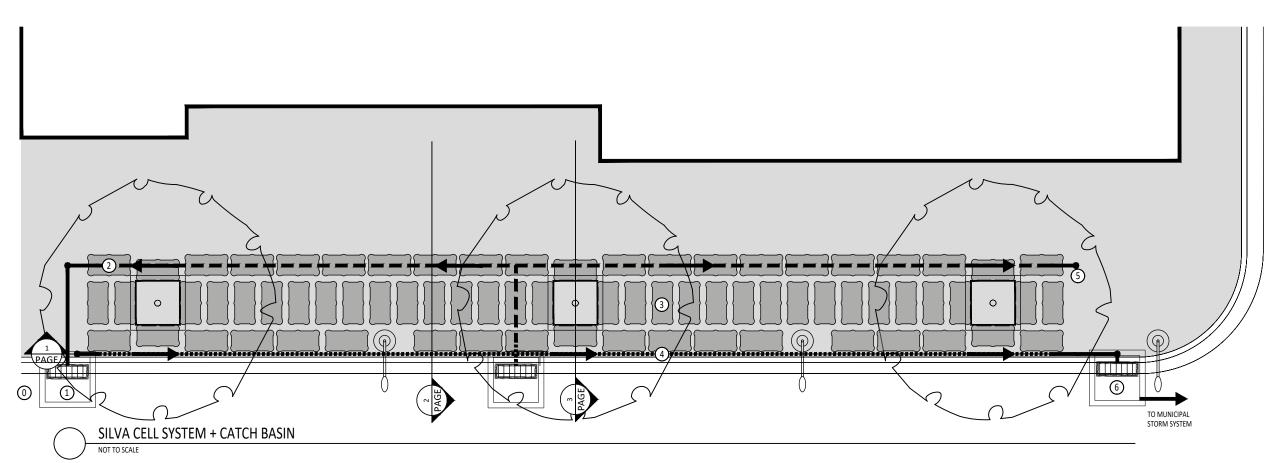



KEY PLAN


- O PRETREATMENT, AS REQUIRED, BY OTHERS. OUTLET OF PRETREATMENT BECOMES THE INLET TO THE SILVA CELL SYSTEM
- 1 STORMWATER ENTERS THE SILVA CELL SYSTEM THROUGH A CATCH BASIN
- 2 WATER IS DISTRIBUTED THROUGH THE SILVA CELL SYSTEM THROUGH PERFORATED PIPES
- 3 WATER THEN MOVES THROUGH THE PLANTING SOIL HOUSED WITHIN THE SILVA CELL SYSTEM
- 4 EXCESS WATER IS COLLECTED IN A PERFORATED DRAIN PIPE AND IS DIRECTED TOWARD A DOWNSTREAM CATCH BASIN
- 5 CLEANOUT

DIRECTION OF WATER FLOW

6 WATER COLLECTED IN THE COLLECTION PIPE IS DIRECTED TO THE MUNICIPAL STORM SYSTEM

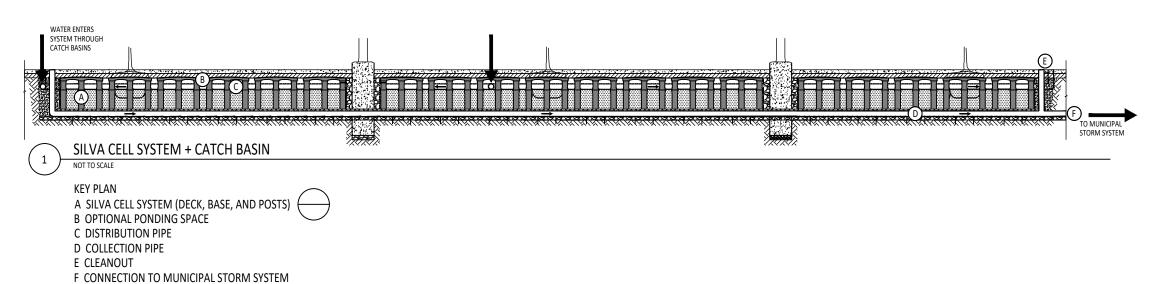

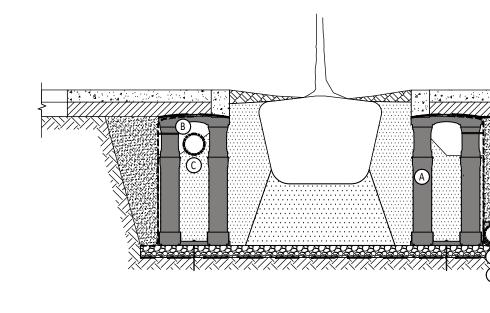

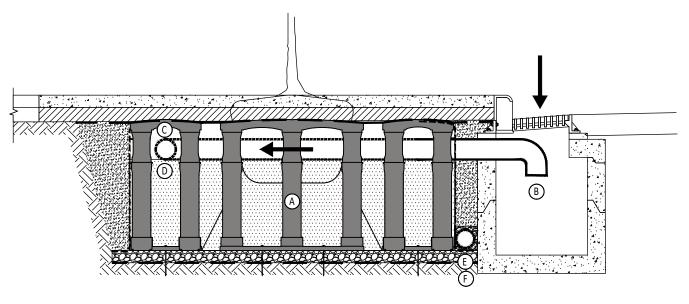

SILVA CELL SYSTEM + CATCH BASIN

NOT TO SCAL

KEY PLAN

A SILVA CELL SYSTEM (DECK, BASE, AND POSTS)



C OPTIONAL PONDING SPACE

D DISTRIBUTION PIPE

E COLLECTION PIPE

F CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW



NOT TO SCALE

KEY PLAN

A SILVA CELL SYSTEM (DECK, BASE, AND POSTS)



C DISTRIBUTION PIPE

D COLLECTION PIPE

E CONNECTION TO MUNICIPAL STORM SYSTEM DIRECTION OF WATER FLOW

